

UDE100XM


GENNEV GENERATORS SILENT SERIES

POWER OUTPUT

Prime Rating — 85 kW (85 kVA)

Standby Rating — 100kW (100kVA)

1-Phase, 60 Hertz, 1.0 PF

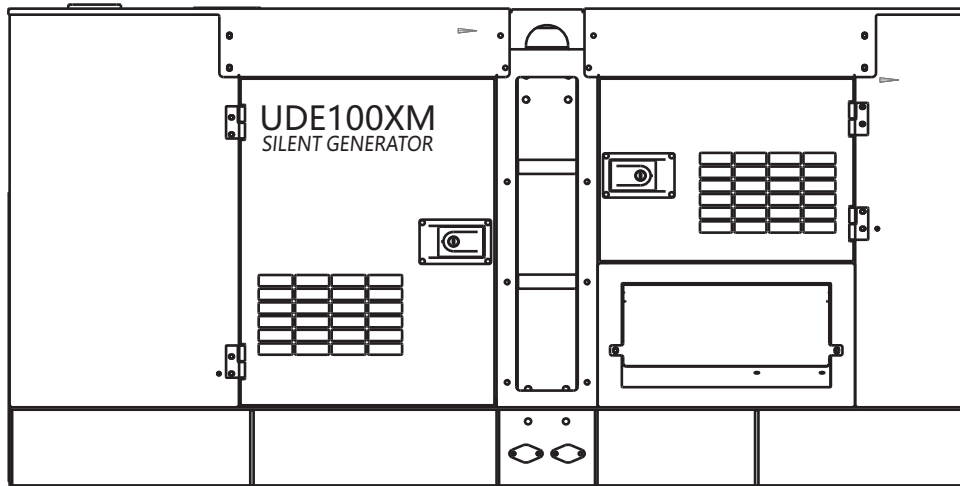

STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
 - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
 - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to $\pm 0.25\%$.
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 73dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel
- E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
 - High visibility LCD display with heated screen and alphanumeric readout.
 - IP65 Protection standard, operational temperature range of -40° to 85° C.
 - Modbus interface for gauge panel and expansion options.
 - DPF cleaning cycle indication.
 - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

GG POWER SILENT SERIES


GG POWER DECIBEL LEVEL

Normal conversation allows substantially lower operating noise levels than competitive designs. GG Gensets are at home on construction sites, in residential neighborhoods, and at hospitals just about anywhere.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 6m
- 50 — Normal conversation

73.0
DECIBELS

GENERATOR OUTPUT PANEL

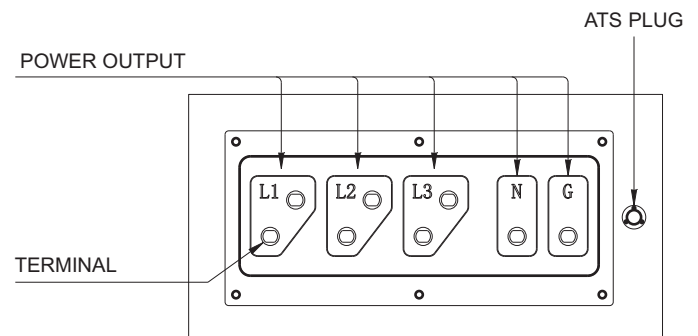

UDE100XM

GENNEV GENERATORS SILENT SERIES

SPECIFICATIONS

| Generator Specifications | |
|--|--|
| Model | Revolving field, self-ventilated weatherproof |
| Armature Connection | Star with Neutral |
| Phase | 3 |
| Standby Output | 100 KW (100KVA) |
| Prime Output | 85KW (85KVA) |
| Power Factor | 1.0 |
| Voltage Regulation (No load to full load) | ±0.5% |
| Generator RPM | 1800 |
| Frequency | 60 Hz |
| No. of Poles | 4 |
| Excitation | Brushless with AVR |
| Frequency Regulation: No Load to Full Load | Isochronous under varying loads from no load to 100% rated load |
| Frequency Regulation: Steady State | ±0.25% of mean value for constant loads from no load to full load. |
| Insulation | Class H |
| Sound Level dB(A) Full load at 7M | 73 |

| Amperage | |
|---|--------------|
| Rated Voltage | Maximum Amps |
| 1Ø Volt 110/220 | 454.5Amps |
| 1Ø Volt 120/240 | 416.7Amps |
| / | / |
| / | / |
| Main Line Circuit Breaker Rating | 630 Amps |
| Over Current Relay Trip Set Point 220V Mode | 700 Amps |

| Fuel System | |
|------------------------------|---------------------------|
| Maximum Fuel Flow (per hour) | 7.93 gallons (30 liters) |
| Fuel Tank Capacity | 93.7 gallons (354 liters) |
| Fuel Consumption | L / h |
| At full load | 15 |
| At 3/4 load | 12 |
| At 1/2 load | 9.3 |
| At 1/4 load | 7.8 |

| Control system | |
|--------------------|-------------------------------|
| Controller Brand | Deepsea |
| Model | DSE4520 |
| Module | Manual/Auto start/stop module |
| Standard function | Engine control |
| | Generator monitoring |
| | Generator protection |
| | Specification |
| Display | Frequency |
| | Battery voltage |
| | Running hour |
| Warning/shutdown | under/over voltage |
| | under/over speed |
| | under/over frequency |
| | Low oil pressure |
| | High water temperature |
| Communication port | USB |

| Engine Specifications | |
|---------------------------|---|
| Make / Model | FAW/ CA4DF2-14D |
| Emissions | / |
| Starting System | Electrical start |
| Design | 4 cylinder 4-cycle, water cooled, direct injection, Turcharged&intercooling |
| Displacement | 4.75Lliters |
| No. cylinders | 4 |
| Bore x Stroke | 110*125mm |
| Gross Engine Power Output | 147.4hp (110 kW) |
| Compression Ratio | 17:1 |
| Engine Speed | 1800 rpm |
| Overspeed Limit | 2070 rpm |
| Oil Capacity | 4.23gallons (16 liters) |
| Coolant Capacity | 7.4 gallons (28 liters) |
| Battery | 24V 60Ah x 1 |

| Alternator | |
|---------------------------------|-------------------------------|
| Alternator Brand | Mecc alte |
| Alternator Model | ECP 34 1S4A |
| Excitation | Brushless,Self-Excited system |
| Capacity(KVA) | 100kva |
| Power(KW) | 100kw |
| Efficiency(%) | 85.3% |
| Insulation class | Class H |
| Protection class | Ip23 |
| Steady state voltage regulation | ±1% |
| Voltage control | AVR |

WARRANTY*

Generator



12 months from date of purchase or 1000 running hours (whichever occurs first)

NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.


UDE100XM

GENNEV GENERATORS SILENT SERIES

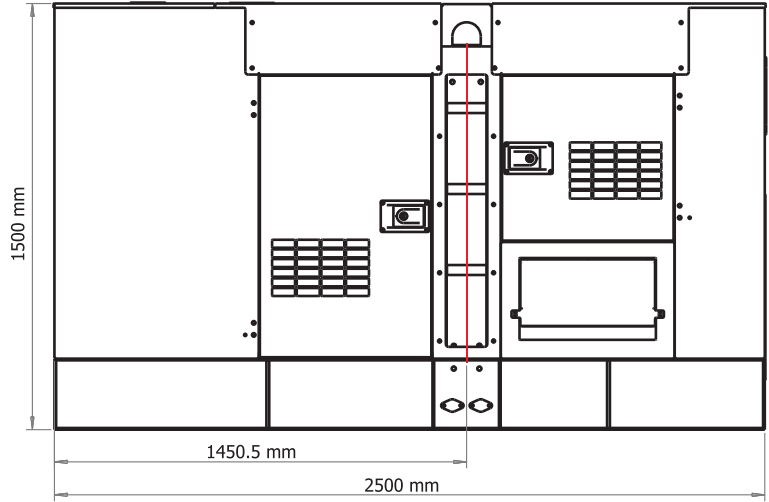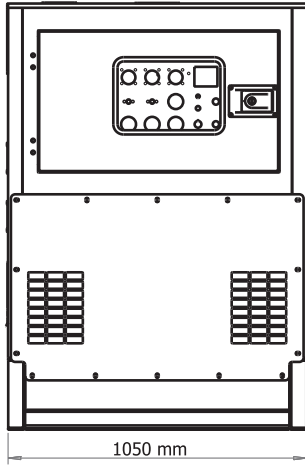

Weight

| | |
|-----------------------------|-----------------------|
| Dry Weight | 3960 lbs. (1800 kg) |
| Wet Weight | 4738 lbs. (2154 kg) |
| Max. Lifting Point Capacity | 9477.6 lbs. (4308 kg) |

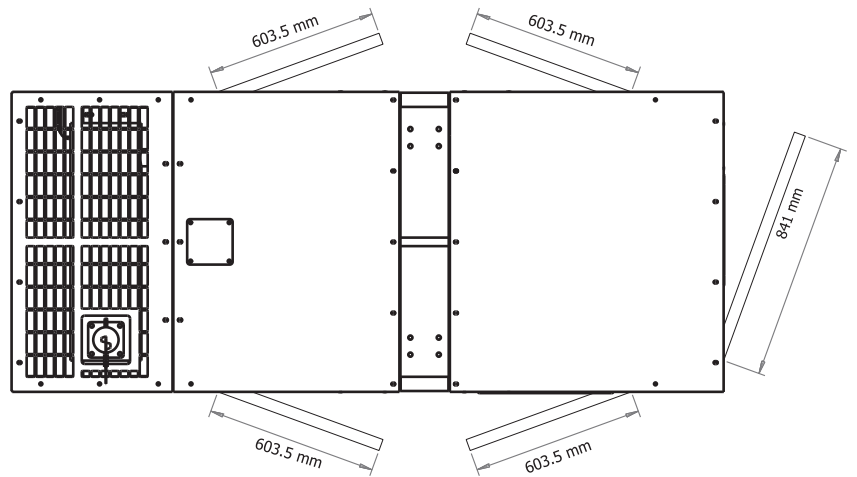

Manufactured for
DEEPER DISCOUNTS LLC
 Email: sales@gennevgenerators.com