


UDE375CKM

GENNEV GENERATORS SILENT SERIES

POWER OUTPUT

Prime Rating — 275 kW (344 kVA)
Standby Rating — 300 kW (375 kVA)
3-Phase, 60 Hertz, 0.8 PF

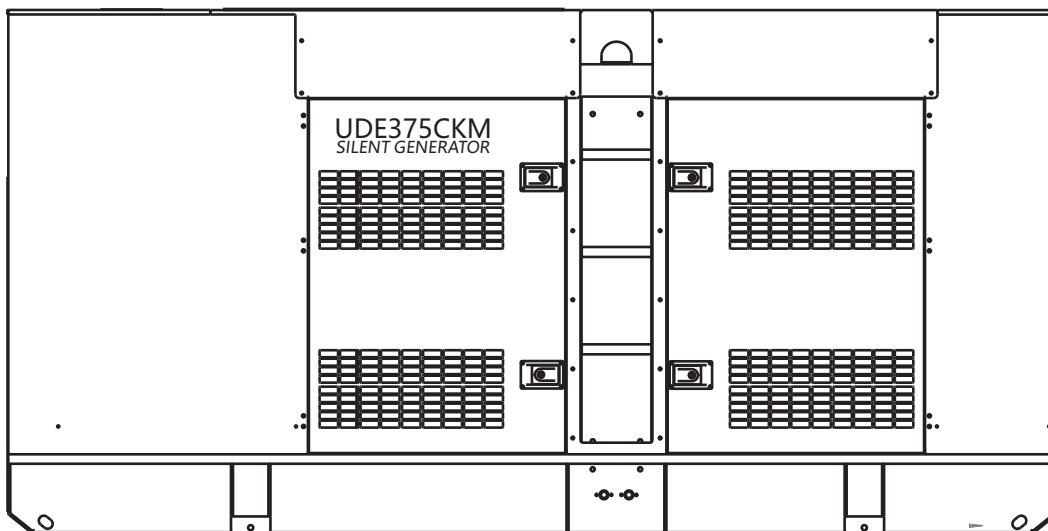

STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
 - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
 - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to $\pm 0.25\%$.
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 80dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel
- E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
 - High visibility LCD display with heated screen and alphanumeric readout.
 - IP65 Protection standard, operational temperature range of -40° to 85° C.
 - Modbus interface for gauge panel and expansion options.
 - DPF cleaning cycle indication.
 - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

GG POWER SILENT SERIES

GG POWER DECIBEL LEVEL


Normal conversation allows substantially lower operating noise levels than competitive designs. GG Gensets are at home on construction sites, in residential neighborhoods, and at hospitals just about anywhere.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 6m
- 50 — Normal conversation

→ GG Genset at 7m

80.0
DECIBELS

GENERATOR OUTPUT PANEL

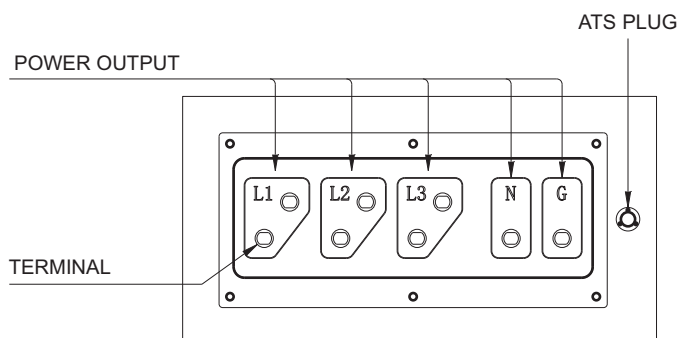

UDE375CKM

GENNEV GENERATORS SILENT SERIES

SPECIFICATIONS

| Generator Specifications | |
|--|--|
| Model | Revolving field, self-ventilated weatherproof |
| Armature Connection | Star with Neutral |
| Phase | 3 |
| Standby Output | 300KW (375KVA) |
| Prime Output | 275KW (344KVA) |
| Power Factor | 0.8 |
| Voltage Regulation (No load to full load) | ±0.5% |
| Generator RPM | 1800 |
| Frequency | 60 Hz |
| No. of Poles | 4 |
| Excitation | Brushless with AVR |
| Frequency Regulation: No Load to Full Load | Isochronous under varying loads from no load to 100% rated load |
| Frequency Regulation: Steady State | ±0.25% of mean value for constant loads from no load to full load. |
| Insulation | Class H |
| Sound Level dB(A) Full load at 7M | 82 |

| Amperage | |
|--|--------------|
| Rated Voltage | Maximum Amps |
| 3Ø Volt 127/220 | 986.8 Amps |
| / | / |
| / | / |
| / | / |
| Main Line Circuit Breaker Rating | 1000 Amps |
| Over Current Relay Trip Set Point 220V Mode Only | 1100 Amps |

| Fuel System | |
|------------------------------|----------------------------|
| Maximum Fuel Flow (per hour) | 39.6 gallons (150 liters) |
| Fuel Tank Capacity | 142.1 gallons (500 liters) |
| Fuel Consumption | L / h |
| At full load | 78 |
| At 3/4 load | 60 |
| At 1/2 load | 42 |
| At 1/4 load | 24 |

| Control system | |
|--------------------|-------------------------------|
| Controller Brand | Deepsea |
| Model | DSE7320 |
| Module | Manual/Auto start/stop module |
| Standard function | Engine control |
| | Generator monitoring |
| | Generator protection |
| | Specification |
| Display | Frequency |
| | Battery voltage |
| | Running hour |
| Warning/shutdown | under/over voltage |
| | under/over speed |
| | under/over frequency |
| | Low oil pressure |
| | High water temperature |
| Communication port | RS232,RS485 |

| Engine Specifications | |
|---------------------------|---|
| Make / Model | Cummins / NTA855-G1B |
| Emissions | / |
| Starting System | Electrical start |
| Design | 4-cycle, water cooled, direct injection Turbocharged and aftercooled |
| Displacement | 14 liters |
| No. cylinders | 6 |
| Bore x Stroke | 140 x 152 mm |
| Gross Engine Power Output | 469 hp (350 kW) |
| Compression Ratio | 14.5 : 1 |
| Engine Speed | 1800 rpm |
| Overspeed Limit | 2070 rpm |
| Oil Capacity | 10.2 gallons (38.6 liters) |
| Coolant Capacity | 22.46 gallons (85 liters) |
| Battery | 24V 100Ah x 2 |

| Alternator | |
|---------------------------------|--------------------------------|
| Alternator Brand | Mecc alte |
| Alternator Model | ECO38 2L4A |
| Excitation | Brushless, Self-Excited system |
| Capacity(KVA) | 375kva |
| Power(KW) | 300kw |
| Efficiency(%) | 90% |
| Insulation class | Class H |
| Protection class | Ip23 |
| Steady state voltage regulation | ±1% |
| Voltage control | AVR |

WARRANTY*

Generator



12 months from date of purchase or 1000 hours (whichever occurs first).

NOTICE

Enough Air flow is extremely important to Generator operation.
Improper connection can cause electrocution and/or property damage.
Do not connect to any electrical system except through an approved device.
Specifications are subject to change without notice.


UDE375CKM

GENNEV GENERATORS SILENT SERIES

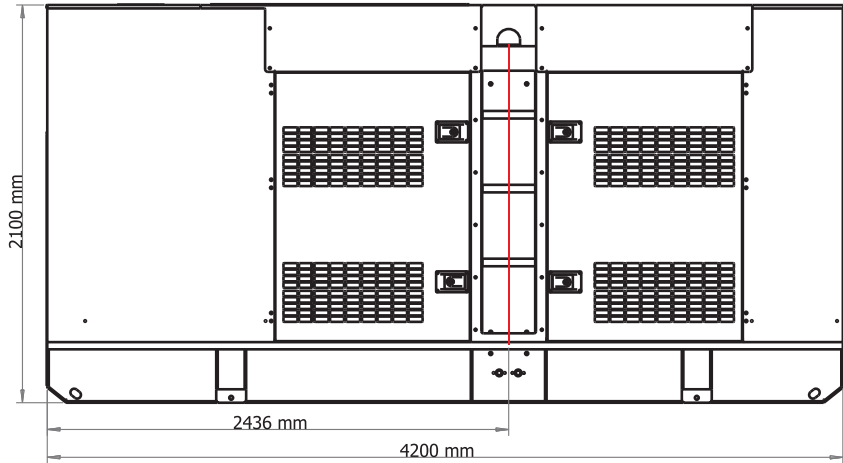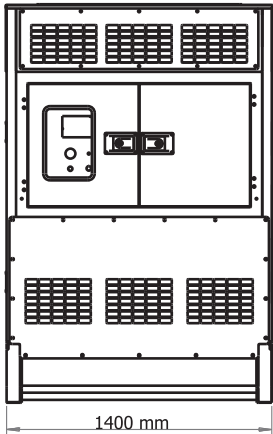

Weight

| | |
|-----------------------------|----------|
| Dry Weight | 3,750 kg |
| Wet Weight | 4,250 kg |
| Max. Lifting Point capacity | 8,600 kg |

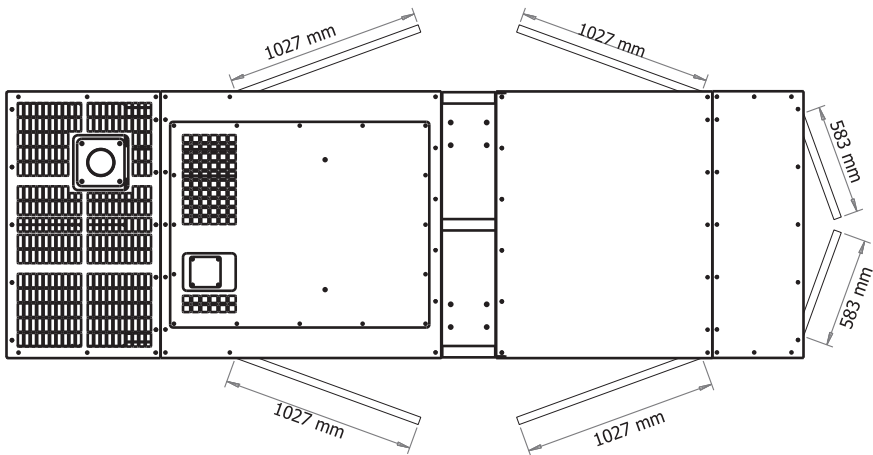

Manufactured for
DEEPER DISCOUNTS LLC
Email:sales@gennevgenerators.com