

UDE1000CKM


GENNEV GENERATORS SILENT SERIES

POWER OUTPUT

Prime Rating — 720 kW (900 kVA)

Standby Rating — 800 kW (1000kVA)

3-Phase, 60 Hertz, 0.8 PF

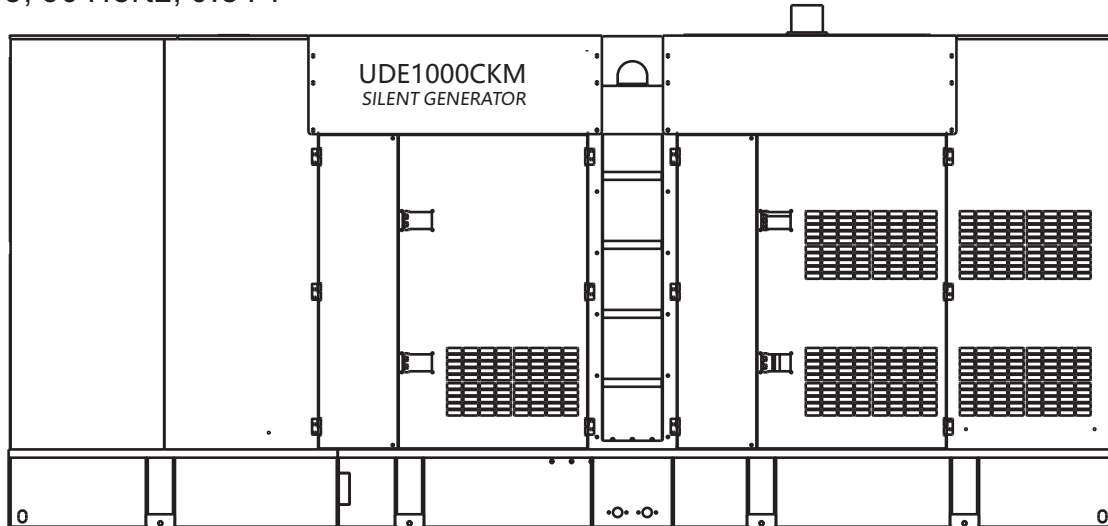

STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
 - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
 - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to $\pm 0.25\%$.
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 88dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel
- E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
 - High visibility LCD display with heated screen and alphanumeric readout.
 - IP65 Protection standard, operational temperature range of -40° to 85° C.
 - Modbus interface for gauge panel and expansion options.
 - DPF cleaning cycle indication.
 - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

GG POWER SILENT SERIES

GG POWER DECIBEL LEVEL


Normal conversation allows substantially lower operating noise levels than competitive designs. GG Gensets are at home on construction sites, in residential neighborhoods, and at hospitals

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 6m
- 50 — Normal conversation

→ GG Genset at 7m

88.0
DECIBELS

GENERATOR OUTPUT PANEL

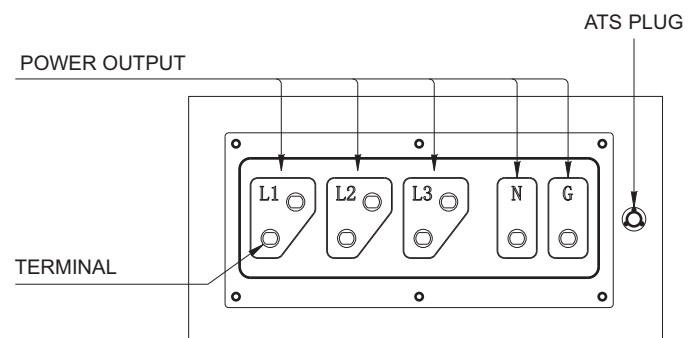

UDE1000CKM

GENNEV GENERATORS SILENT SERIES

SPECIFICATIONS

Generator Specifications	
Model	Revolving field, self-ventilated weatherproof
Armature Connection	Star with Neutral
Phase	3
Standby Output	800KW (1000KVA)
Prime Output	720KW (900KVA)
Power Factor	0.8
Voltage Regulation (No load to full load)	±0.5%
Generator RPM	1800
Frequency	60 Hz
No. of Poles	4
Excitation	Brushless with AVR
Frequency Regulation: No Load to Full Load	Isochronous under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	±0.25% of mean value for constant loads from no load to full load.
Insulation	Class H
Sound Level dB(A) Full load at 7M	88

Amperage	
Rated Voltage	Maximum Amps
3Ø Volt 127/220	2631.6 Amps
/	/
/	/
/	/
Main Line Circuit Breaker Rating	3200 Amps
Over Current Relay Trip Set Point 127/220V Mode Only	3520 Amps

Fuel System	
Maximum Fuel Flow (per hour)	79.3 gallons (300 liters)
Fuel Tank Capacity	269.5 gallons (1020 liters)
Fuel Consumption	L / h
At full load	204
At 3/4 load	157
At 1/2 load	111
At 1/4 load	67

Control system	
Controller Brand	Deepsea
Model	DSE7320
Module	Manual/Auto start/stop module
Standard function	Engine control
	Generator monitoring
	Generator protection
	Specification
Display	Frequency
	Battery voltage
	Running hour
Warning/shutdown	under/over voltage
	under/over speed
	under/over frequency
	Low oil pressure
	High water temperature
Communication port	RS232,RS485

Engine Specifications	
Make / Model	Cummins / KTA38-G2
Emissions	/
Starting System	Electrical start
Design	4-cycle, water cooled, direct injection Turbocharged and aftercooled
Displacement	37.8 liters
No. cylinders	12
Bore x Stroke	159 x 159 mm
Gross Engine Power Output	1200 hp (895 kW)
Compression Ratio	14.5 : 1
Engine Speed	1800 rpm
Overspeed Limit	2070 rpm
Oil Capacity	35.7 gallons (135 liters)
Coolant Capacity	28 gallons (106 liters)
Battery	24V 120Ah x 4

Alternator	
Alternator Brand	Mecc alte
Alternator Model	ECO43 1S4A
Excitation	Brushless, Self-Excited system
Capacity(KVA)	1000kva
Power(KW)	800kw
Efficiency(%)	92%
Insulation class	Class H
Protection class	Ip23
Steady state voltage regulation	±1%
Voltage control	AVR

WARRANTY*

Generator



12 months from date of purchase or 1000 hours (whichever occurs first).

NOTICE


Enough Air flow is extremely important to Generator operation.
Improper connection can cause electrocution and/or property damage.
Do not connect to any electrical system except through an approved device.
Specifications are subject to change without notice.

UDE1000CKM

GENNEV GENERATORS SILENT SERIES

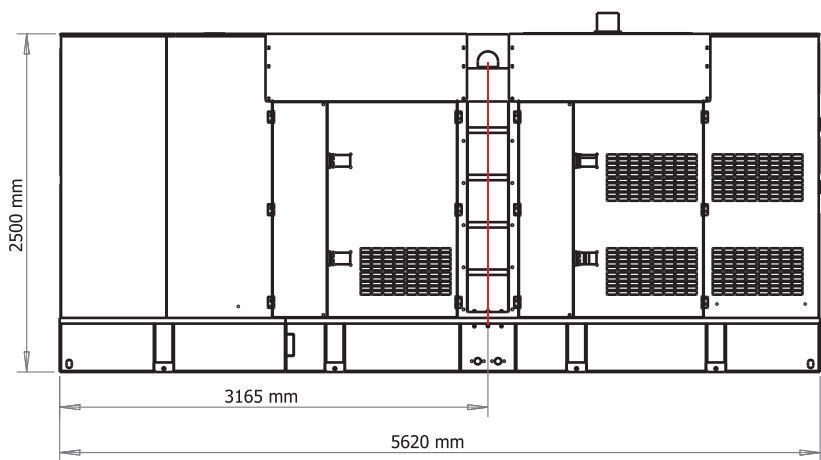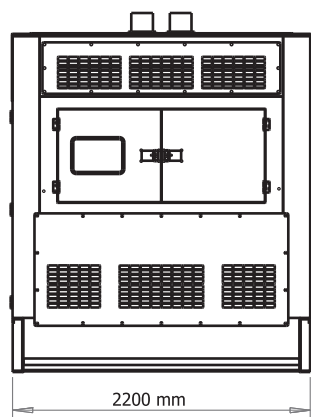

Weight	
Dry Weight	4,795 lbs. (10,550 kg)
Wet Weight	5,250 lbs. (11,550 kg)
Max. Lifting Point capacity	11,818 lbs. (26,000 kg)

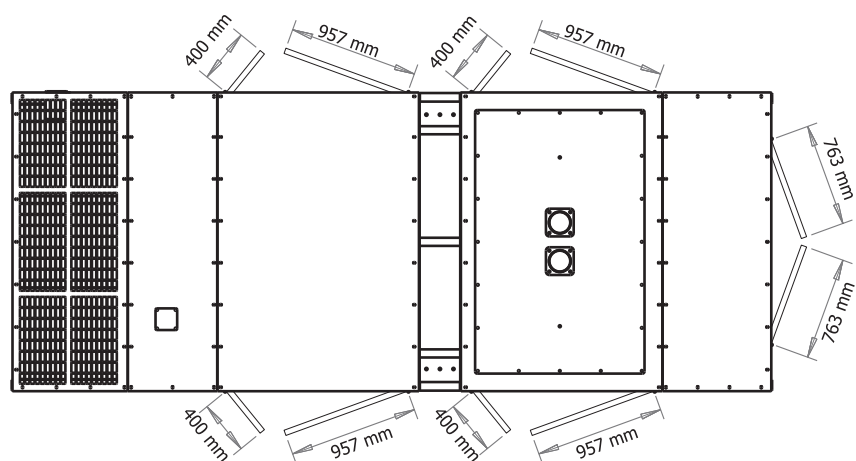

Manufactured for
DEEPER DISCOUNTS LLC
Email: sales@gennevgenerators.com